

**Application:**

Relaying and metering

**Frequency:**

50 - 400Hz:

**Insulation Level:**

600 Volts, 10kV BIL full wave




- Terminals are brass studs No. 8 - 32 with one flat washer, lockwasher and regular nut
- Other ratios available upon request
- Order mounting bracket kit separately
- Approximate weight: 13 lbs

Approvals



# Model 110

**Window Diameter 4.0"**

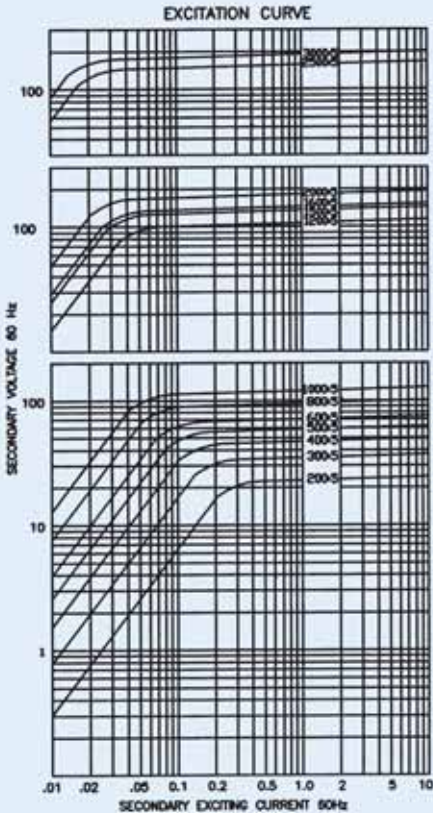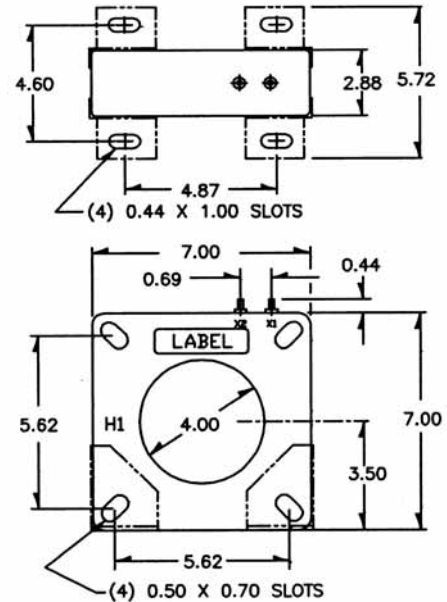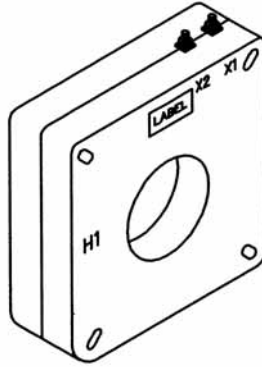

Catalogue Number	Current Ratio	V.A. for ±1% class	ANSI Metering class at 60Hz					Secondary winding resistance (OHMS @ 75°C)	Continuous thermal rating factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@30°C	@55°C
100 - 201	200:5	C10	0.6	0.6	1.2	2.4	-	0.057	2.0	2.0
110 - 201	200:5	C10	0.6	1.2	1.2	2.4	-	0.085	2.0	2.0
110 - 301	300:5	C20	0.3	0.6	0.6	1.2	2.4	0.128	2.0	2.0
110 - 401	400:5	C20	0.3	0.3	0.3	0.6	1.2	0.152	2.0	2.0
110 - 501	500:5	C20	0.3	0.3	0.3	0.6	0.6	0.214	2.0	1.5
110 - 601	600:5	C50	0.3	0.3	0.3	0.3	0.6	0.256	2.0	1.5
110 - 801	800:5	C50	0.3	0.3	0.3	0.3	0.3	0.342	1.5	1.33
110 - 102	1000:5	C50	0.3	0.3	0.3	0.3	0.3	0.427	1.5	1.0
110 - 122	1200:5	C50	0.3	0.3	0.3	0.3	0.3	0.489	1.5	1.0
110 - 152	1500:5	C100	0.3	0.3	0.3	0.3	0.3	0.611	1.33	1.0
110 - 162	1600:5	C100	0.3	0.3	0.3	0.3	0.3	0.652	1.0	1.0
110 - 202	2000:5	C100	0.3	0.3	0.3	0.3	0.3	0.815	1.0	0.8
110 - 252	2500:5	C100	0.3	0.3	0.3	0.3	0.3	0.974	1.0	0.8
110 - 302	3000:5	C100	0.3	0.3	0.3	0.3	0.3	1.168	1.0	0.6