

Application:

Relaying and metering

Frequency:

50 - 400Hz

Insulation Level:

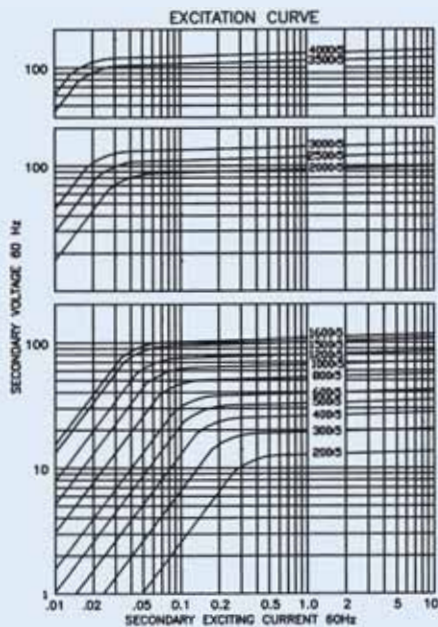
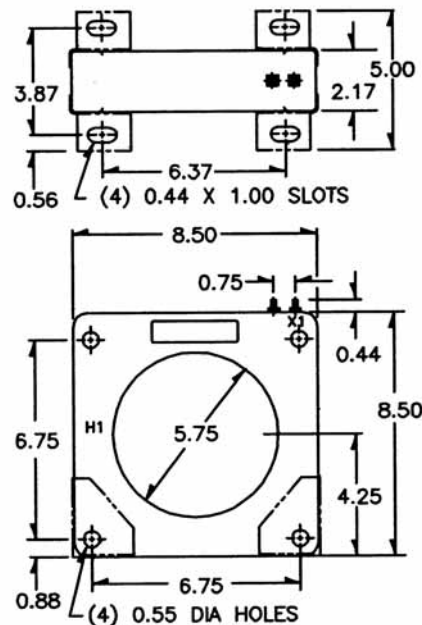
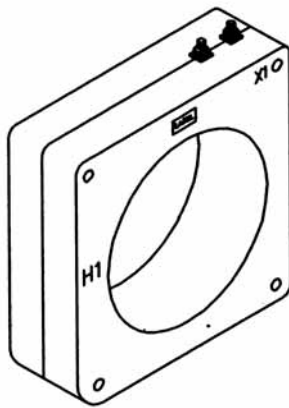
600 Volts, 10kV BIL full wave

- Terminals are brass studs No. 8 - 32 with one flat washer, lockwasher and regular nut
- Multi ratios available upon request
- Order mounting bracket kit separately
- Approximate weight: 11 lbs

Approvals



Model 120

Window Diameter 5.75"

Catalogue Number	Current Ratio	Relay Class	ANSI metering class at 60Hz					Secondary winding resistance (OHMS @ 75 °C)	Continuous thermal rating factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@30 °C	@55 °C
120 - 201	200:5	-	1.2	1.2	2.4	4.8	4.8	0.053	2.0	2.0
120 - 301	300:5*	C10	0.3	0.6	1.2	2.4	2.4	0.063	2.0	2.0
120 - 401	400:5*	C10	0.3	0.3	0.6	1.2	2.4	0.080	2.0	2.0
120 - 501	500:5*	C20	0.3	0.3	0.3	0.6	1.2	0.137	2.0	2.0
120 - 601	600:5*	C20	0.3	0.3	0.3	0.6	0.6	0.165	2.0	2.0
120 - 801	800:5*	C20	0.3	0.3	0.3	0.3	0.6	0.220	2.0	1.5
120 - 102	1000:5*	C20	0.3	0.3	0.3	0.3	0.3	0.309	1.5	1.5
120 - 122	1200:5*	C50	0.3	0.3	0.3	0.3	0.3	0.371	1.5	1.33
120 - 152	1500:5*	C50	0.3	0.3	0.3	0.3	0.3	0.464	1.5	1.0
120 - 162	1600:5*	C50	0.3	0.3	0.3	0.3	0.3	0.494	1.33	1.0
120 - 202	2000:5*	C50	0.3	0.3	0.3	0.3	0.3	0.592	1.33	1.0
120 - 252	2500:5*	C50	0.3	0.3	0.3	0.3	0.3	0.740	1.0	0.8
120 - 302	3000:5*	C50	0.3	0.3	0.3	0.3	0.3	0.888	1.0	0.8
120 - 352	3500:5	C20	0.3	0.3	0.3	0.3	0.3	0.964	1.0	0.8
120 - 402	4000:5*	C50	0.3	0.3	0.3	0.3	0.3	1.102	1.0	0.8