



Models 64, 65, 66

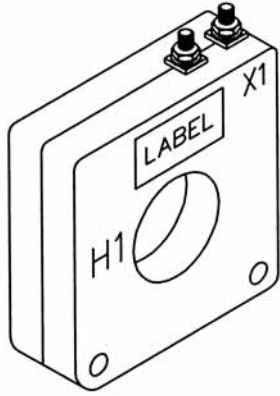

Window Diameter 1.56", 2.0", 2.5"

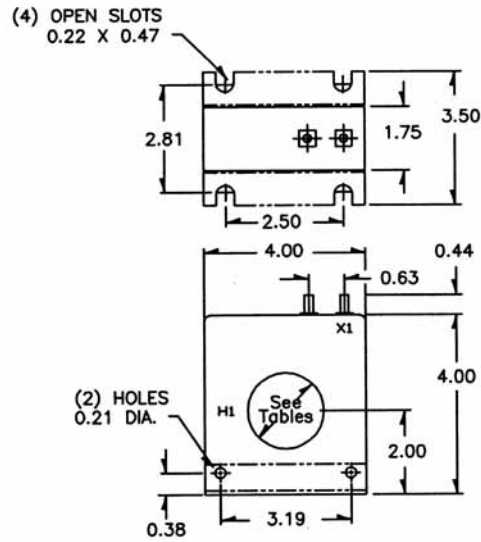

Application:
Metering

Frequency:
50 - 400Hz

Insulation Level:

- 600 Volts, 10kV BIL full wave
- Terminals are brass studs No. 8 - 32 with one flatwasher, lockwasher and regular nut
- Order mounting bracket kit separately


Approvals





Model 64

Window Diameter 1.56"
Approximate weight: 3.75 lbs

Catalogue Number	Current Ratio	V.A. for ±1% class	ANSI Metering class at 60Hz					Secondary winding resistance (OHMS @ 75°C)	Continuous thermal rating factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@30°C	@55°C
64 - 500	50:5	2.5±2%	2.4	-	-	-	-	0.011	2.0	2.0
64 - 750	75:5	4.0	1.2	2.4	-	-	-	0.020	2.0	2.0
64 - 101	100:5	5.0	1.2	1.2	4.8	4.8	-	0.026	2.0	2.0
64 - 151	150:5	7.5	0.6	0.6	1.2	2.4	4.8	0.043	2.0	2.0
64 - 201	200:5	12.5	0.3	0.3	1.2	1.2	2.4	0.063	2.0	1.5
64 - 251	250:5	20.0	0.3	0.3	0.6	1.2	2.4	0.074	2.0	1.5
64 - 301	300:5	35.0	0.3	0.3	0.3	0.6	1.2	0.086	2.0	1.5
64 - 401	400:5	50.0	0.3	0.3	0.3	0.6	1.2	0.110	1.5	1.33
64 - 501	500:5	50.0	0.3	0.3	0.3	0.3	0.6	0.173	1.5	1.0

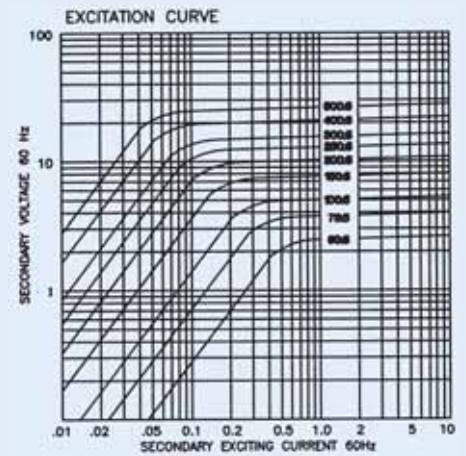

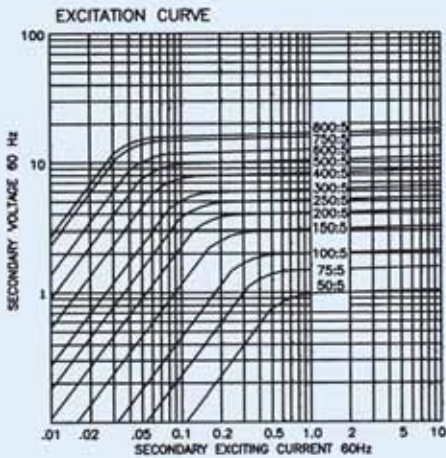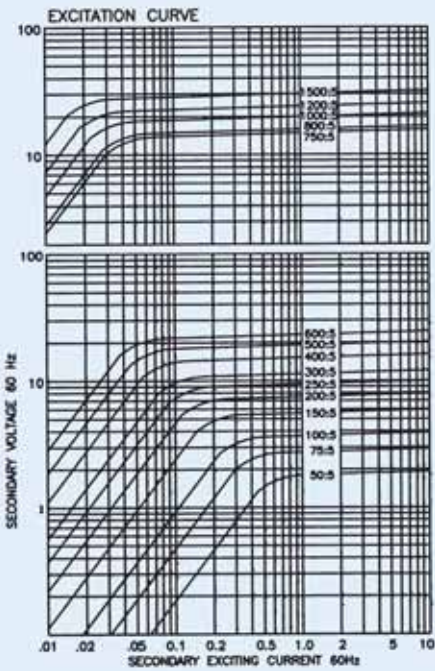

Model 65

Window Diameter 2.0"

Approximate weight: 3.25 lbs

Catalogue Number	Current Ratio	V.A. for $\pm 1\%$ class	ANSI Metering class at 60Hz					Secondary winding resistance (OHMS @ 75 °C)	Continuous thermal rating factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@30 °C	@55 °C
65 - 500	50:5	2.0	2.4	-	-	-	-	0.007	2.0	2.0
65 - 750	75:5	4.0	2.4	2.4	-	-	-	0.013	2.0	2.0
65 - 101	100:5	4.0	1.2	1.2	4.8	-	-	0.022	2.0	2.0
65 - 151	150:5	6.0	0.6	0.6	2.4	4.8	4.8	0.039	2.0	2.0
65 - 201	200:5	12.5	0.6	0.6	1.2	2.4	2.4	0.047	2.0	2.0
65 - 251	250:5	15.0	0.3	0.3	0.6	1.2	2.4	0.067	2.0	1.5
65 - 301	300:5	20.0	0.3	0.3	0.6	1.2	2.4	0.077	2.0	1.5
65 - 401	400:5	35.0	0.3	0.3	0.3	0.6	1.2	0.110	1.5	1.25
65 - 501	500:5	50.0	0.3	0.3	0.3	0.6	1.2	0.155	1.33	1.0
65 - 601	600:5	60.0	0.3	0.3	0.3	0.3	0.6	0.186	1.25	1.0
65 - 751	750:5	75.0	0.3	0.3	0.3	0.6	0.6	0.197	1.0	0.8
65 - 801	800:5	80.0	0.3	0.3	0.3	0.3	0.6	0.210	1.0	0.8
65 - 102	1000:5	100.0	0.3	0.3	0.3	0.3	0.6	0.253	1.0	0.8
65 - 122	1200:5	105.0	0.3	0.3	0.3	0.3	0.3	0.316	1.0	0.8
65 - 152	1500:5	140.0	0.3	0.3	0.3	0.3	0.3	0.491	1.0	0.8

Model 66

Window Diameter 2.5"

Approximate weight: 2.5 lbs

Catalogue Number	Current Ratio	V.A. for $\pm 1\%$ class	ANSI Metering class at 60Hz					Secondary winding resistance (OHMS @ 75 °C)	Continuous thermal rating factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@30 °C	@55 °C
65 - 500	50:5	2.0	2.4	-	-	-	-	0.007	2.0	2.0
66 - 500	50:5	1.5 \pm 2%	-	-	-	-	-	0.006	2.0	2.0
66 - 750	75:5	2.5 \pm 2%	2.4	-	-	-	-	0.008	2.0	2.0
66 - 101	100:5	2.5	1.2	2.4	-	-	-	0.013	2.0	2.0
66 - 151	150:5	4.0	1.2	1.2	2.4	4.8	-	0.020	2.0	2.0
66 - 201	200:5	5.0	0.6	0.6	2.4	2.4	4.8	0.038	2.0	2.0
66 - 251	250:5	10.0	0.6	0.6	1.2	2.4	4.8	0.045	2.0	2.0
66 - 301	300:5	12.5	0.3	0.3	1.2	2.4	2.4	0.065	2.0	1.5
66 - 401	400:5	20.0	0.3	0.3	0.6	1.2	1.2	0.082	1.5	1.33
66 - 501	500:5	30.0	0.3	0.3	0.6	1.2	1.2	0.017	1.5	1.25
66 - 601	600:5	40.0	0.3	0.3	0.6	0.6	1.2	0.162	1.33	1.0
66 - 751	750:5	50.0	0.3	0.3	0.3	0.6	0.6	0.202	1.0	0.8
66 - 801	800:5	60.0	0.3	0.3	0.3	0.6	0.6	0.216	1.0	0.8