

# CURRENT TRANSFORMER

Model 6A

Window Diameter 2.06"

**Application:**  
Ammeters and wattmeters


**Frequency:**  
50 - 400 Hz

**Insulation Level:**  
600 Volts, 10 kv BIL full wave


- Terminals are brass studs No. 8 - 32 UNC with one flatwasher, lockwasher and regular nut.
- Flexible leads are UL 1015 105° C, CSA approved, #16 AWG, 24" long.
- Non-standard lead length can be specified
- Order mounting bracket kit H when required for Model 6ASHT.
- Model 6ASHT and model 6ASFT are also available as 6ASHL and 6ASFL with leads.
- Approximate weight: 1.25 lbs.




E228202






**6ASHT**



**6ARL**



**6ASFT**

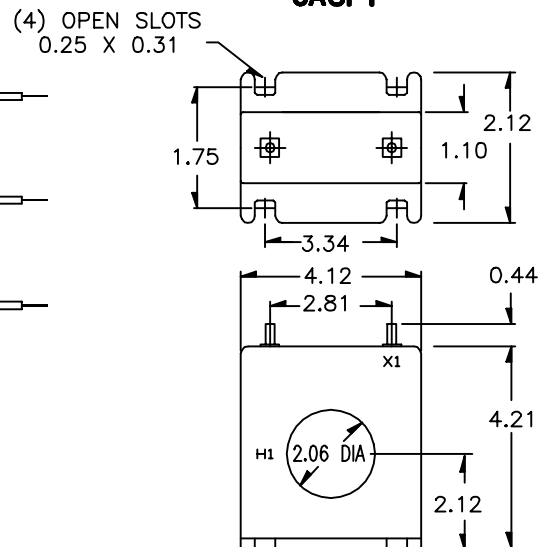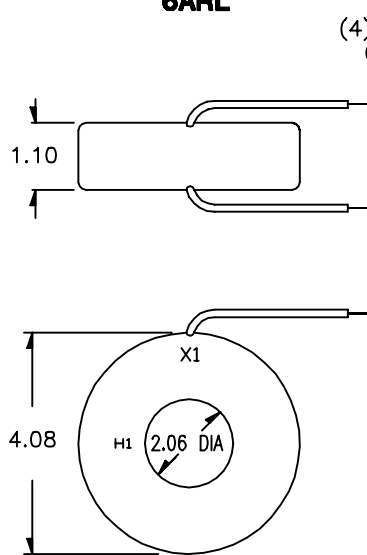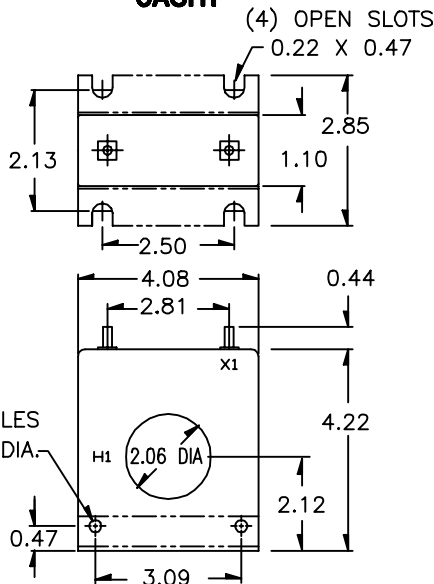

CATALOG NUMBER	CURRENT RATIO	V.A. FOR ±1% CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
6A**- 101	100:5	1.0	1.2	2.4	—	—	—	0.015	2.0	2.0
6A**- 151	150:5	5.0	1.2	1.2	2.4	4.8	—	0.024	2.0	2.0
6A**- 201	200:5	5.0	0.6	1.2	2.4	2.4	4.8	0.037	2.0	2.0
6A**- 251	250:5	7.5	0.3	0.6	1.2	2.4	4.8	0.044	2.0	1.5
6A**- 301	300:5	12.5	0.3	0.3	1.2	2.4	2.4	0.055	2.0	1.5
6A**- 401	400:5	15.0	0.3	0.3	0.6	1.2	1.2	0.071	1.5	1.33
6A**- 501	500:5	25.0	0.3	0.3	0.6	1.2	1.2	0.107	1.5	1.0
6A**- 601	600:5	30.0	0.3	0.3	0.6	0.6	1.2	0.128	1.33	1.0
6A**- 751	750:5	30.0	0.3	0.3	0.3	0.6	1.2	0.156	1.25	1.0
6A**- 801	800:5	35.0	0.3	0.3	0.3	0.6	0.6	0.167	1.25	0.8
6A**- 102	1000:5	35.0	0.3	0.3	0.3	0.3	0.6	0.208	1.0	0.8
6A**- 122	1200:5	40.0	0.3	0.3	0.3	0.3	0.3	0.250	1.0	0.8
6A**- 152	1500:5	50.0	0.3	0.3	0.3	0.3	0.3	0.388	1.0	0.8

\*\* NOTE: When ordering, prefix Cat No. with model designation required, i.e. 6ASHT-201, or 6ARL-301 etc.