


Application Note



Connection Diagram 373-GFR to 262-300

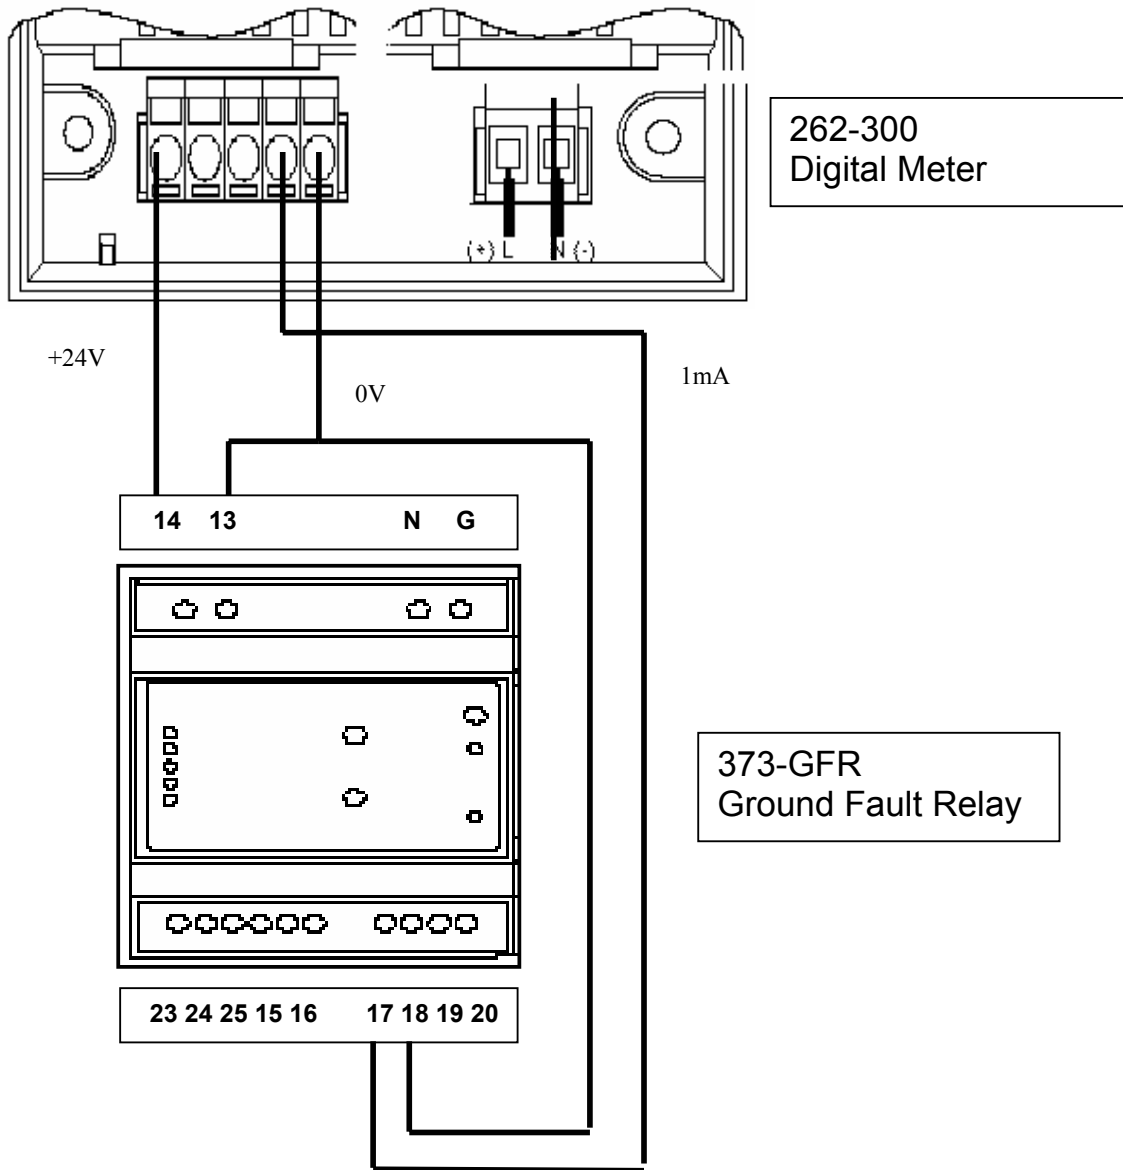

The 262-300 Meter provides an isolated 24Vdc output which is intended to power measuring transducers for process control, so long as the load does not exceed 50mA. The GFR requires a 24V supply, and since power consumption is low, this supply can be obtained from the 262-30 meter when connected as per the above diagram.