



# Current Transformer

**Model 296 - 300**

**CERTIFICATIONS:**



**APPLICATION:**

Metering

**FREQUENCY:**

50-400 Hz.

**INSULATION LEVEL:**

600 Volts. 10 kV BIL. full wave

**WINDOW DIAMETER:**

1.50", 2.25", 3.0", 3.38", 3.75"

**APPROXIMATE WEIGHT:**

18, 15, 12, 10, 9 lbs.

**CONNECTIONS:**

-Terminals are brass studs No. 8-32

UNC with one flat washer,


lockwasher, and regular nut

-Multi-ratios available upon request

Model	296	297	298	299	300
Window Size	1.50	2.25	3.00	3.38	3.75
Width	5.96	5.96	5.96	5.96	5.96
Height	6.31	6.31	6.31	6.31	6.31
Depth	3.00	3.00	3.00	3.00	3.00


**MODEL 296**  
**Window Diameter 1.50"**  
**Approximate weight: 18 lbs.**

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
296 - 500	50:5	C10	1.2	2.4	4.8	-	-	0.018	2.0	2.0
296 - 750	75:5	C10	0.6	1.2	2.4	4.8	-	0.027	2.0	2.0
296 - 101	100:5	C20	0.6	0.6	1.2	2.4	4.8	0.035	2.0	2.0
296 - 151	150:5	C20	0.3	0.3	0.6	1.2	2.4	0.053	2.0	2.0
296 - 201	200:5	C20	0.3	0.3	0.6	0.6	1.2	0.071	2.0	2.0
296 - 251	250:5	C50	0.3	0.3	0.3	0.3	0.6	0.121	2.0	2.0
296 - 301	300:5	C50	0.3	0.3	0.3	0.3	0.6	0.168	2.0	1.5
296 - 401	400:5	C100	0.3	0.3	0.3	0.3	0.3	0.224	2.0	1.5
296 - 501	500:5	C50	0.3	0.3	0.3	0.3	0.3	0.249	1.5	1.5
296 - 601	600:5	C100	0.3	0.3	0.3	0.3	0.3	0.298	1.5	1.33
296 - 751	750:5	C100	0.3	0.3	0.3	0.3	0.3	0.373	1.5	1.0
296 - 801	800:5	C100	0.3	0.3	0.3	0.3	0.3	0.398	1.5	1.0
296 - 102	1000:5	C100	0.3	0.3	0.3	0.3	0.3	0.447	1.33	1.0




Products are manufactured in a plant whose quality management system is certified / registered as being in conformity with ISO 9001

Model 296

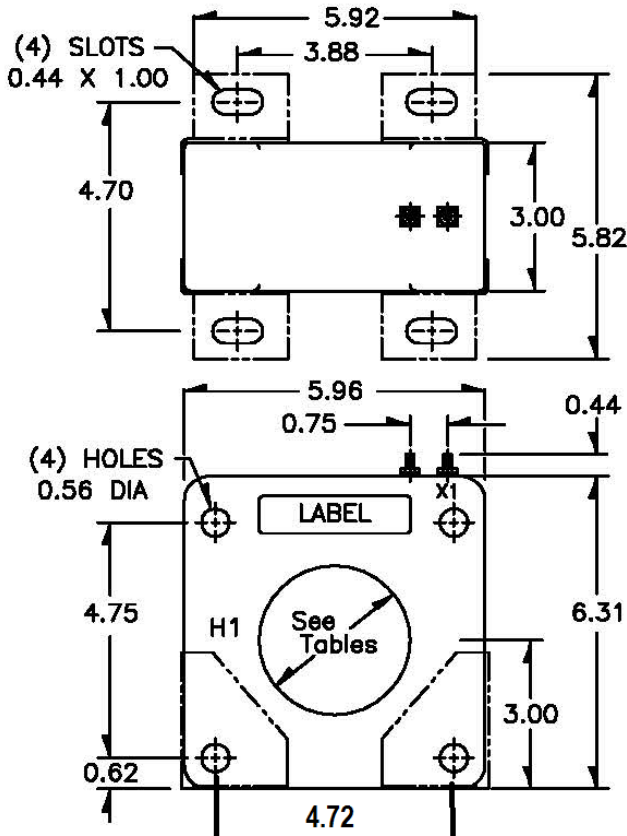

EXCITATION CURVE

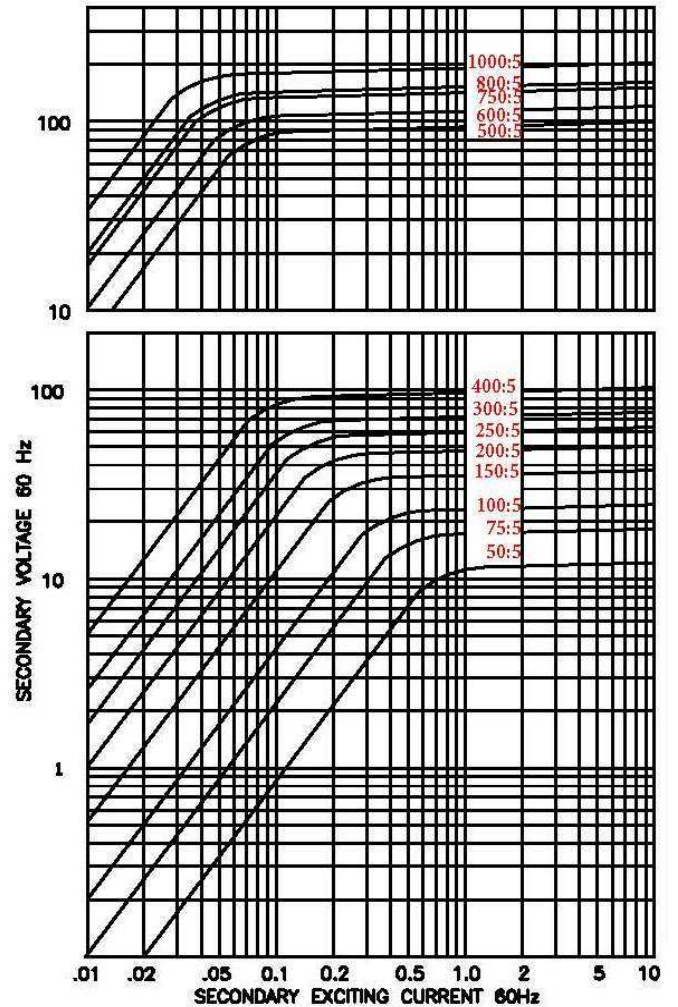

Model 296




# Current Transformer

**Model 296 - 300**

**MODEL 297**  
 Window Diameter 2.25"  
 Approximate weight: 15 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
297 - 500	50:5	-	2.4	4.8	-	-	-	0.015	2.0	2.0
297 - 750	75:5	C10	1.2	2.4	4.8	4.8	-	0.023	2.0	2.0
297 - 101	100:5	C10	0.6	1.2	2.4	4.8	4.8	0.051	2.0	2.0
297 - 151	150:5	C20	0.6	0.6	1.2	2.4	2.4	0.048	2.0	2.0
297 - 201	200:5	C20	0.3	0.6	0.6	1.2	2.4	0.103	2.0	2.0
297 - 251	250:5	C20	0.3	0.3	0.3	0.6	1.2	0.111	2.0	2.0
297 - 301	300:5	C50	0.3	0.3	0.3	0.6	1.2	0.154	2.0	1.5
297 - 401	400:5	C50	0.3	0.3	0.3	0.3	0.6	0.205	2.0	1.5
297 - 501	500:5	C50	0.3	0.3	0.3	0.3	0.3	0.233	2.0	1.5
297 - 601	600:5	C100	0.3	0.3	0.3	0.3	0.3	0.308	1.5	1.33

## EXCITATION CURVE

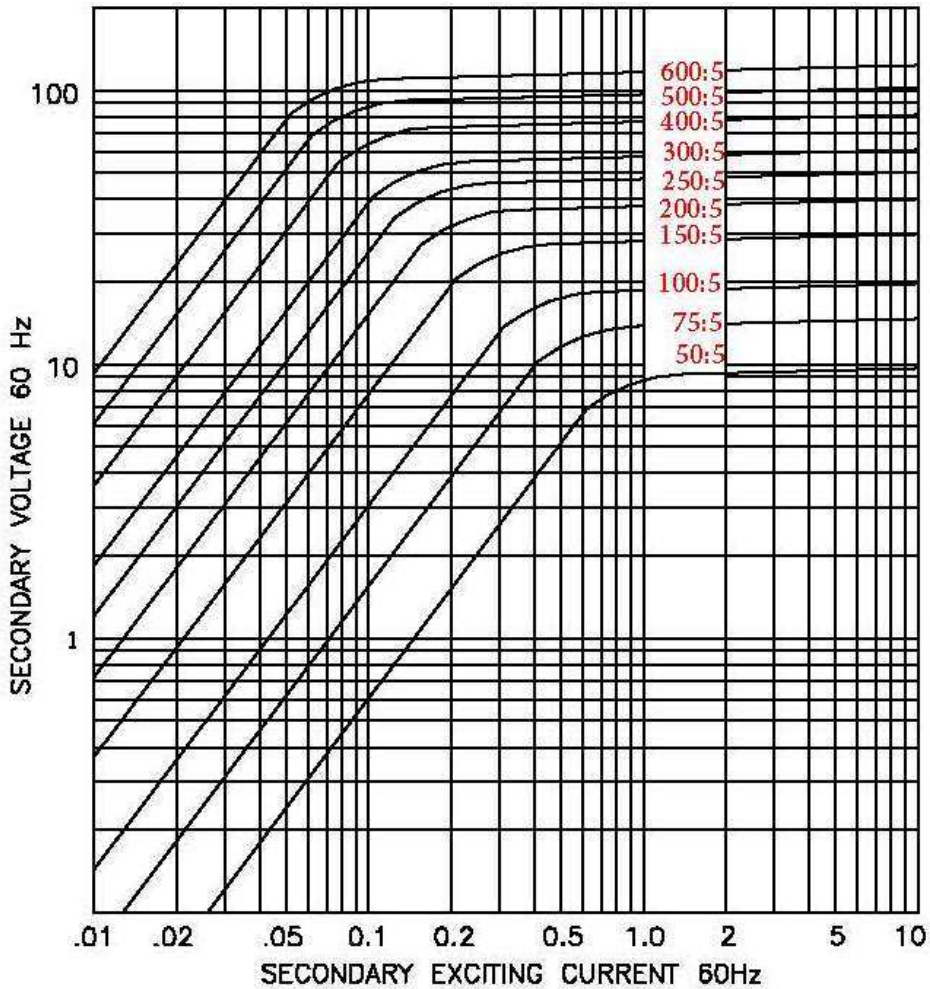

Model 297

Products are manufactured in a plant whose quality management system is certified / registered as being in conformity with ISO 9001




# Current Transformer

**Model 296 - 300**

**MODEL 298**  
 Window Diameter 3.0"  
 Approximate weight: 12 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
298 - 500	50:5	-	2.4	4.8	-	-	-	0.023	2.0	2.0
298 - 750	75:5	-	1.2	1.2	4.8	-	-	0.028	2.0	2.0
298 - 101	100:5	C10	0.6	0.6	2.4	4.8	-	0.040	2.0	2.0
298 - 151	150:5	C10	0.6	0.6	1.2	2.4	4.8	0.060	2.0	2.0
298 - 201	200:5	C20	0.6	0.6	0.6	1.2	2.4	0.080	2.0	2.0
298 - 251	250:5	C20	0.3	0.3	0.6	1.2	2.4	0.073	2.0	2.0
298 - 301	300:5	C20	0.3	0.3	0.6	0.6	1.2	0.087	2.0	2.0
298 - 401	400:5	C20	0.3	0.3	0.3	0.3	0.6	0.186	2.0	1.5
298 - 501	500:5	C50	0.3	0.3	0.3	0.3	0.6	0.233	2.0	1.5
298 - 601	600:5	C50	0.3	0.3	0.3	0.3	0.3	0.279	1.5	1.33
298 - 751	750:5	C50	0.3	0.3	0.3	0.3	0.3	0.349	1.5	1.0
298 - 801	800:5	C50	0.3	0.3	0.3	0.3	0.3	0.372	1.5	1.0

### EXCITATION CURVE

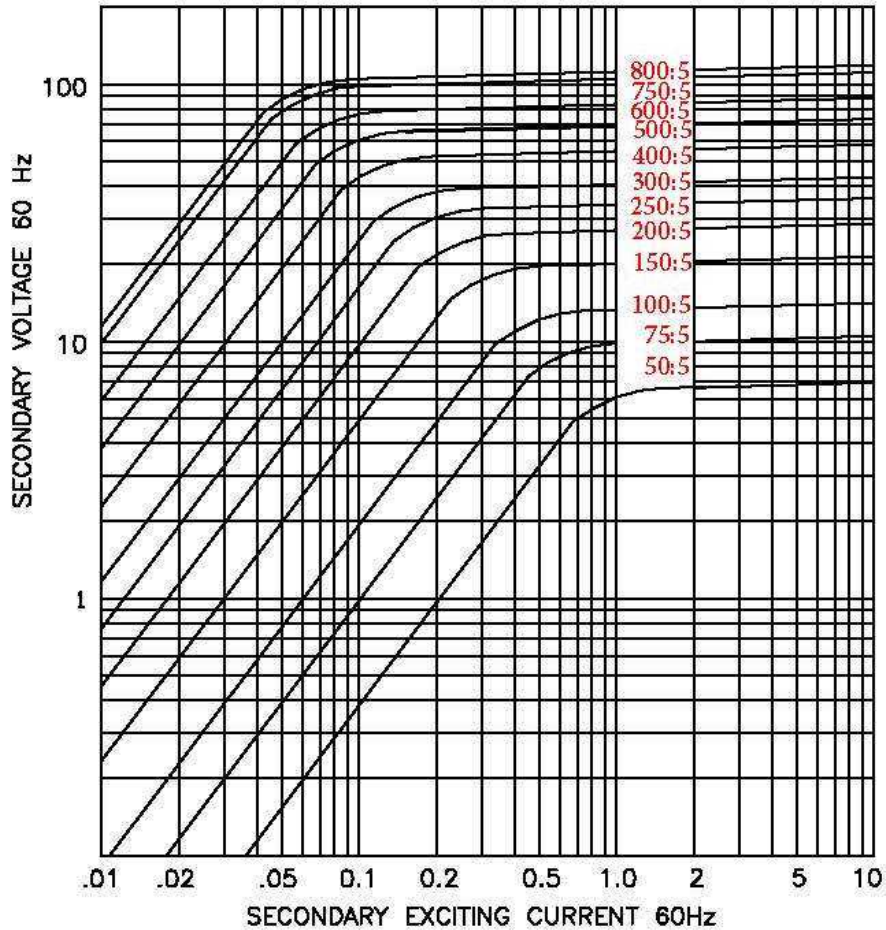

Model 298

Products are manufactured in a plant whose quality management system is certified / registered as being in conformity with ISO 9001






# Current Transformer

**Model 296 - 300**

**Model 299**  
**Window Diameter 3.38"**  
**Approximate weight: 10 lbs.**

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
299 - 500	50:5	-	4.8	4.8	-	-	-	0.022	2.0	2.0
299 - 750	75:5	-	1.2	2.4	4.8	-	-	0.028	2.0	2.0
299 - 101	100:5	C10	0.6	1.2	2.4	4.8	-	0.038	2.0	2.0
299 - 151	150:5	C10	0.6	0.6	1.2	2.4	4.8	0.057	2.0	2.0
299 - 201	200:5	C10	0.6	0.6	1.2	1.2	2.4	0.088	2.0	2.0
299 - 251	250:5	C20	0.3	0.3	0.6	1.2	2.4	0.098	2.0	2.0
299 - 301	300:5	C20	0.3	0.3	0.3	0.6	1.2	0.118	2.0	2.0
299 - 401	400:5	C20	0.3	0.3	0.3	0.6	0.6	0.177	2.0	1.5
299 - 501	500:5	C20	0.3	0.3	0.3	0.3	0.6	0.221	2.0	1.5
299 - 601	600:5	C50	0.3	0.3	0.3	0.3	0.3	0.265	1.5	1.33
299 - 751	750:5	C50	0.3	0.3	0.3	0.3	0.3	0.331	1.5	1.0
299 - 801	800:5	C50	0.3	0.3	0.3	0.3	0.3	0.353	1.5	1.0

## EXCITATION CURVE

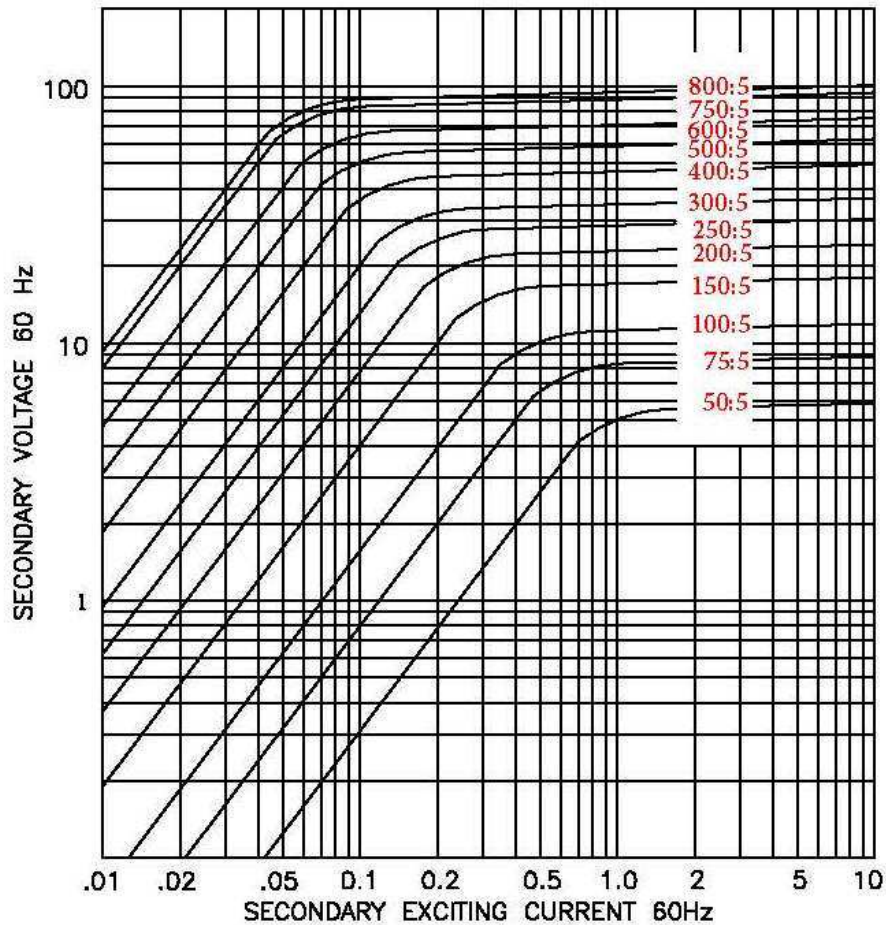

## Model 299

Products are manufactured in a plant whose quality management system is certified / registered as being in conformity with ISO 9001




# Current Transformer

**Model 296 - 300**

**MODEL 300**  
 Window Diameter 3.75"  
 Approximate weight: 9 lbs.

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 HZ					SECONDARY WINDING RESISTANCE (OHMS @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
300 - 500	50:5	-	2.4	4.8	-	-	-	0.012	2.0	2.0
300 - 750	75:5	-	2.4	2.4	-	-	-	0.019	2.0	2.0
300 - 101	100:5	-	2.4	2.4	2.4	-	-	0.026	2.0	2.0
300 - 151	150:5	-	0.6	0.6	2.4	2.4	4.8	0.054	2.0	2.0
300 - 201	200:5	C10	0.6	0.6	1.2	2.4	4.8	0.072	2.0	2.0
300 - 251	250:5	C10	0.3	0.6	1.2	1.2	2.4	0.104	2.0	2.0
300 - 301	300:5	C10	0.3	0.3	0.3	0.6	1.2	0.108	2.0	2.0
300 - 401	400:5	C20	0.3	0.3	0.3	0.6	1.2	0.144	2.0	1.5
300 - 501	500:5	C20	0.3	0.3	0.3	0.6	0.6	0.209	2.0	1.5
300 - 601	600:5	C20	0.3	0.3	0.3	0.3	0.6	0.251	1.5	1.33
300 - 751	750:5	C20	0.3	0.3	0.3	0.3	0.3	0.329	1.5	1.0
300 - 801	800:5	C50	0.3	0.3	0.3	0.3	0.3	0.334	1.5	1.0
300 - 102	1000:5	C50	0.3	0.3	0.3	0.3	0.3	0.418	1.33	1.0
300 - 122	1200:5	C10	0.3	0.3	0.3	0.3	0.3	0.425	1.33	1.0
300 - 152	1500:5	C10	0.3	0.3	0.3	0.3	0.3	0.531	1.0	1.0
300 - 162	1600:5	C10	0.3	0.3	0.3	0.3	0.3	0.567	1.0	0.8
300 - 202	2000:5	C20	0.3	0.3	0.3	0.3	0.3	0.708	1.0	0.8

## EXCITATION CURVE

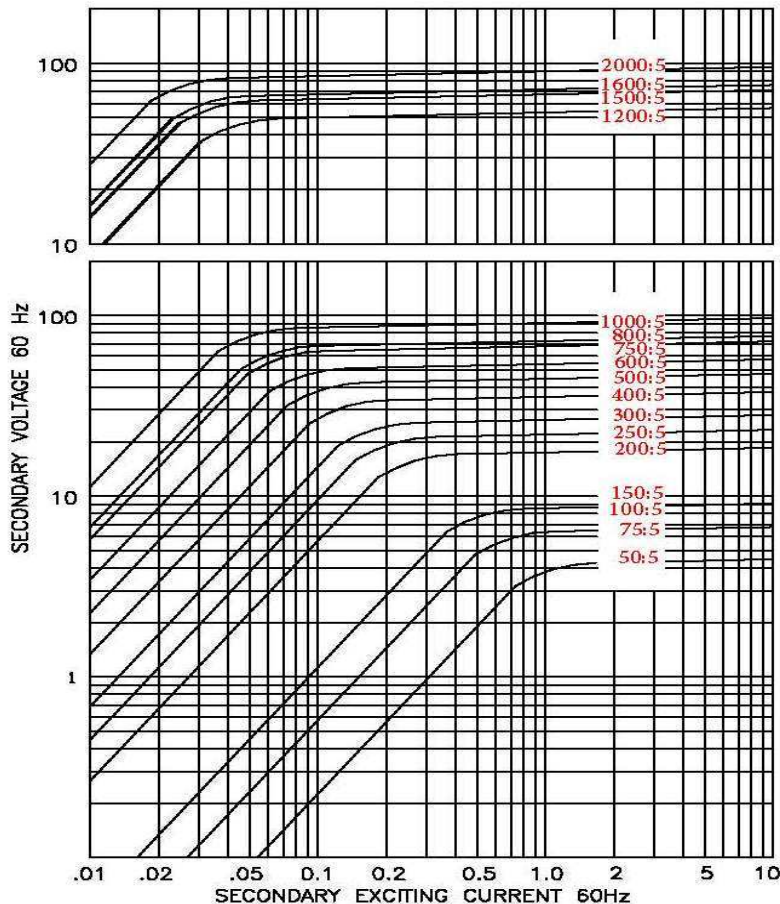

**Model 300**

Products are manufactured in a plant whose quality management system is certified / registered as being in conformity with ISO 9001