

APPLICATION:

To provide power in Motor Control centers and Distribution Switchgear

FREQUENCY:

50/60 Hz.

INSULATION LEVEL:


6.9 kV, 60 kV BIL. full wave

THERMAL RATING:

At 30°C. amb.

APPROXIMATE WEIGHT:

57 lbs.

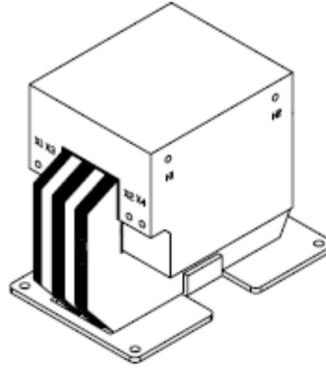


CERTIFICATIONS:



| CATALOG NUMBER | PRIMARY VOLTAGE | RATIO AT 120 V | SECONDARY VOLTAGE | FREQUENCY Hz | THERMAL RATING |
|--------------------|-----------------|----------------|-------------------|--------------|----------------|
| CPT3 60 2 2400 - 6 | 2400 | 20.00 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 3300 - 6 | 3300 | 27.50 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 4160 - 6 | 4160 | 34.66 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 4800 - 6 | 4800 | 40.00 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 5000 - 6 | 5000 | 41.66 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 5500 - 6 | 5500 | 45.83 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 6000 - 6 | 6000 | 50.00 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 6600 - 6 | 6600 | 55.00 | 120/240 | 50/60 | 2.0 kVA |
| CPT3 60 2 6900 - 6 | 6900 | 57.50 | 120/240 | 50/60 | 2.0 kVA |

- Primary and secondary terminal are brass screws No. 10-32 with one flat washer and lockwasher.
- Transformer winding is vacuum encapsulated in polyurethane resin with temperature insulation class of 105°C
- Plated steel mounting base
- For indoor use

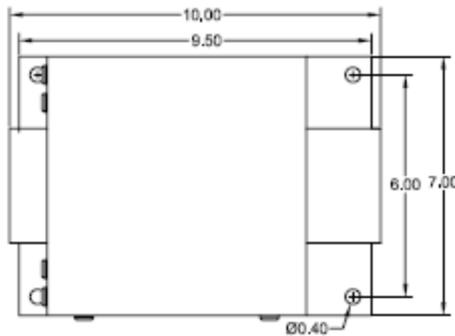

CONNECTION DIAGRAM

